


IPN Remote

Monitoring parameters

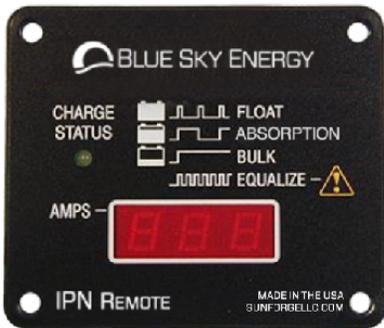

Marine | RV | Off-Grid

IPN Remote display provides basic monitoring for IPN compatible charge controllers from Blue Sky Energy. Monitor battery voltage, output current, and charge control system status for up to 8 charge controllers on a single IPN network. The bright, crisp LED screen reports networked battery voltage and individual or gross output current for each controller across the whole system, providing excellent readability in all lighting conditions. Monitor charge status with simple and intuitive LED indicator.

- Remote display ·
- Monitor performances ·
- Flush mounting ·
- Easy to install ·



Product Features

- Check your system on the bright, crisp LED display
- Monitor charge status with an intuitive LED indicator
- Resists corrosion with conformal coating

Charge Controller Monitoring

- Total output current of all charge controllers
- Individual output current for each charge controller
- Charge status

Battery Monitoring

- Battery voltage
- Output current for single charge controller



IPN Compatibility

- SB1524iX, SB2512i(X)-HV, SB3024(D)iL in IPN network
- SB3000i only as master
- Compatible with BT Connect

Specifications:

IPN Remote

Power Consumption:	0.25 W (typical standby), 1.0 W backlit ON
Display:	3-Digit • 0.30" Low Power LED
Communication and Cabling:	Communication via 25' (7.6 m) RJ-11 4-pin telephone cable provided
Operating Temperature:	-40°C – 40°C
Environmental Protection:	IP00
Weight:	0.017 lb. (42 g)
Dimensions:	2.9" x 2.45" x 0.9" (7.4 cm x 6.2 cm x 2.3 cm)
Warranty:	5 years
Certifications:	CE, FCC, RoHS

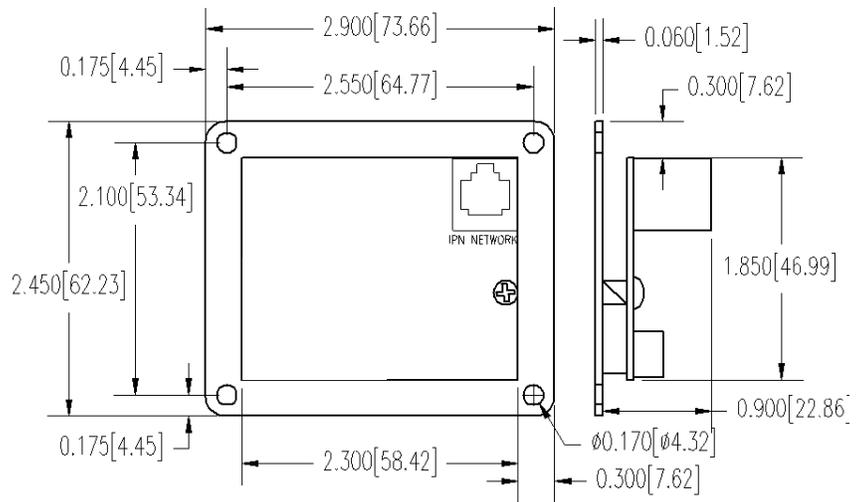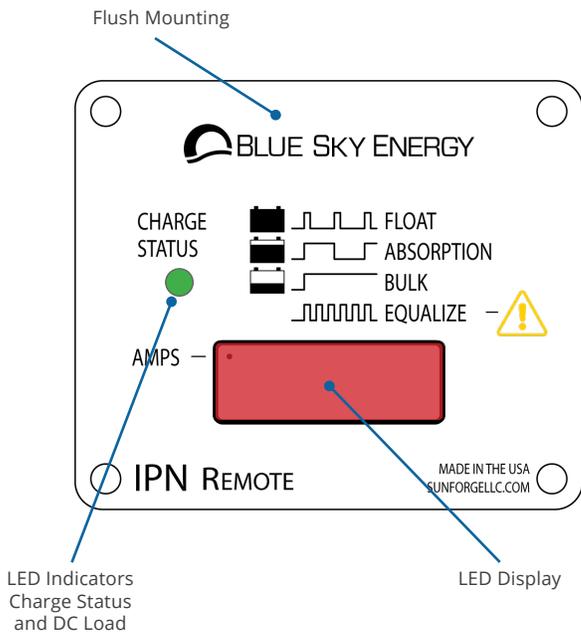

Front View

Side View